




ECOPART 756 L

Special release agent for all gas-curing processes

Product Properties

ECOPART 756 L is an environmentally compatible release agent based on modified polysiloxanes and additives, diluted in highly volatile aliphatic hydrocarbons. ECOPART 756 L should be applied as thinly as possible. ECOPART 756 L has a strong release effect, a long benchlife on the core box and core box cleaning properties without having a negative effect on the core surface.

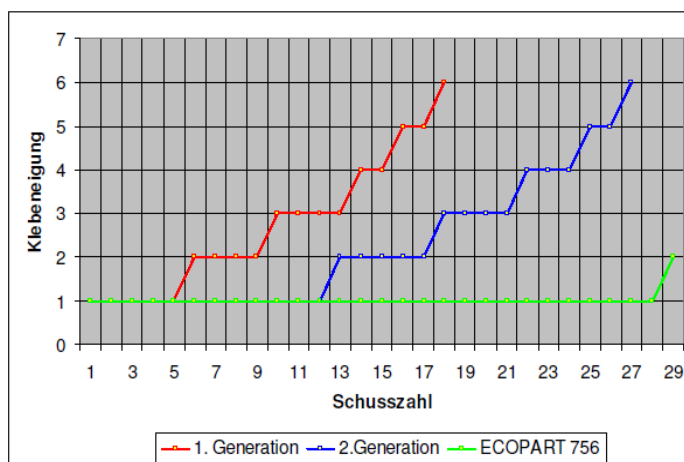

Bei Erreichen der Stufe 6 ist eine weitere Abrüfung unter Laborbedinaunden nicht möglic.

Analytical values

- Modified polysiloxanes and additives in solvents
- State: liquid
- Color: colorless
- Odor: typical
- Solids content: 16.9 – 18.9%
- Flash point DIN 51755: < 0 °C

Storage & Handling

Product Storage Conditions: 24 months (under normal conditions)

- The standard safety measures for handling chemical substances must be observed.
- Keep the container sealed and do not expose to moisture.
- Occasional clouding of the material is characteristic of the product and does not impair the effect of the product.

ASK Chemicals GmbH | Reisholzstraße 16-18 | 40721 Hilden | Tel. +49 21171103-0 | info@ask-chemicals.com | www.ask-chemicals.com

The following marks are registered by ASK Chemicals GmbH, ASK Chemicals Metallurgy GmbH or ASK Chemicals LP in one or more countries: ALPHASET, ASKOBOND, ASKRONING, ASKURAN, BERANOL, BETASET, CERAMCOTE, CHEM-REZ, DENODUL, DISPERSIT, EXACTCAST, EXACTCALC, EXACTFLO, ECOCURE, ECOPART, GERMALLOY, INOBAKE, INFORM, INOTEC, ISOCURE, ISO-FAST, ISOMAX, ISOSEAL, ISOVENTS, LINO-CURE, MAGNASET, MIRATEC, NOVACURE, NOVANOL, NOVASET, OPTIGRAN, OPTINOC, PEP SET, REMMOS, SMW-INSERT, SOLITEC, STA-HOT, UDICELL, VEINO, VEINO ULTRA, VELVACOAT, ZIP SLIP, ZIP CLEAN



ECOPART 756 L

- Keep away from sources of ignition
- NO SMOKING
- Ensure good room ventilation

Packaging

- Canister: 8 kg
- Steel can: 16 kg
- Drum: 130 kg
- Container: 650 kg
- Labelling: Please refer to the Safety Data Sheet

Complimentary Products

All gas-curing processes